



User friendly control panel

- emergency stop
- service indicator
- battery status display



Hand control

Detachable for optimal ergonomic steering.

SmartPack

Easily switch the battery pack to extend runtime through multiple shifts.



[Call us!](#)

- Flexible solution for lifting and transporting everything from reels to drums in an ergonomic and efficient manner.
- Available in two mast sizes; M and L.
- The lifter is available in stainless steel, equipped with a white FDA approved cover, ideal for food manufacturing and pharmaceutical industry
- SafeDrive ensures that if a tool hits an object during lowering, it will stop immediately.
- The lifter is belt driven, resulting in safe, quiet and smooth oil free drive.
- Available with manual or electrical EasyTurn.




Contact your sales representative for bespoke solutions.

Technical specifications


Description	Specifications
PRO100MESE /LESE /MESM /LESM PRO100MESESS /ESESS /MESMSS /LESMSS	89610 / 89620 / 89612 / 89622 89615 / 89625 / 89617 / 89627
Lifting capacity	100 kg
Stroke	1390 / 1940 mm
Weight of unit	115 / 120 kg
Total height of unit	1990 / 2540 mm
Battery charger	100-240V, grounded 50-60 Hz
Battery	2x12V 17Ah
Watt	80 W
Lifts per charge	100 kg x 1m x 100 times
Up and down motions	Hand control (two speed)
Front wheels	Fixed
Brake system	Central brake with directional lock
Overload protection	Incorporated in circuit load
IP-rating	IP24
Lifting speed fast/slow	0,1m/s / 0,05m/s

Description	Specifications
PRO200MESE / PRO200LESE PRO200MESESS /PRO200LESESS	89710 / 89720 89715 / 89725
Lifting capacity	200 kg
Stroke	1360 / 1910 mm
Weight of unit	152 / 158 kg
Total height of unit	1990 / 2540 mm
Battery charger	100-240V, grounded 50-60 Hz
Battery	2x12V 17Ah
Watt	80 W
Lifts per charge	200 kg x 1m x 100 times
Up and down motions	Hand control (two speed)
Front wheels	Fixed
Brake system	Central brake with directional lock
Overload protection	Incorporated in circuit load
IP-rating	IP24
Lifting speed fast/slow	0,1m/s / 0,05m/s


Load diagram

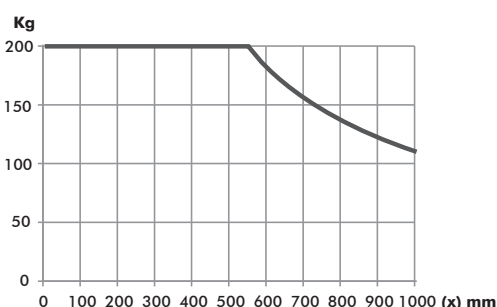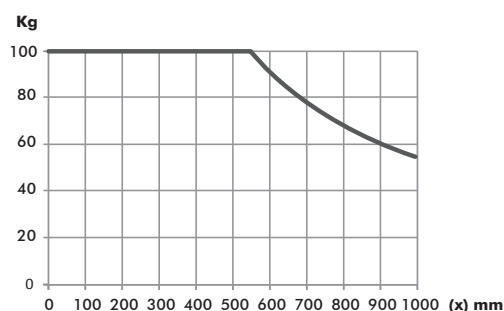

PRO100ESE

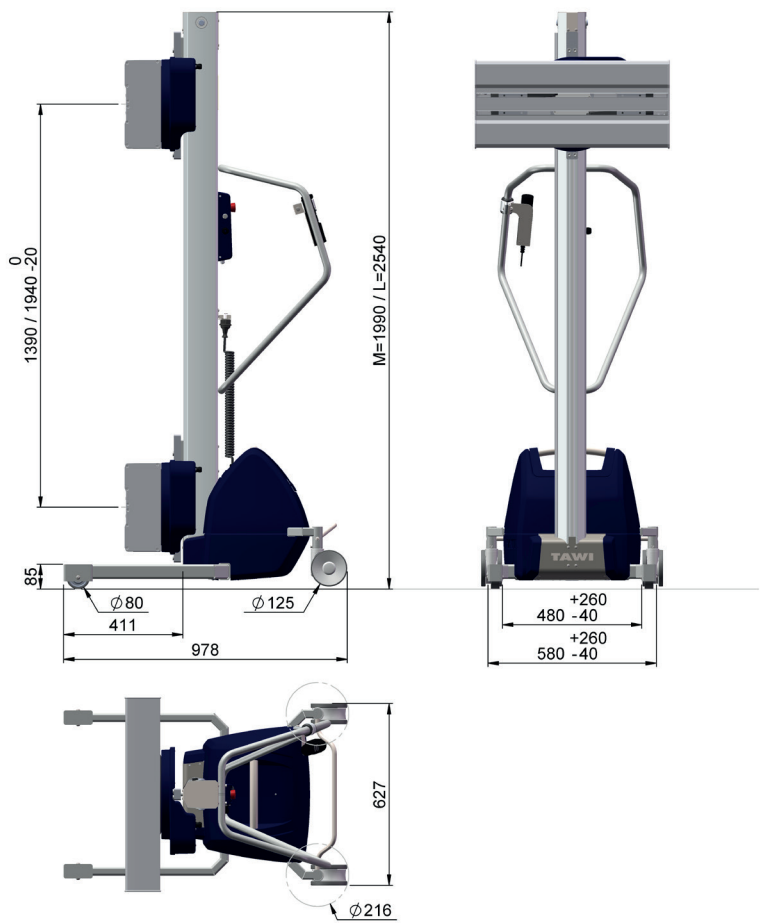

PRO200ESE


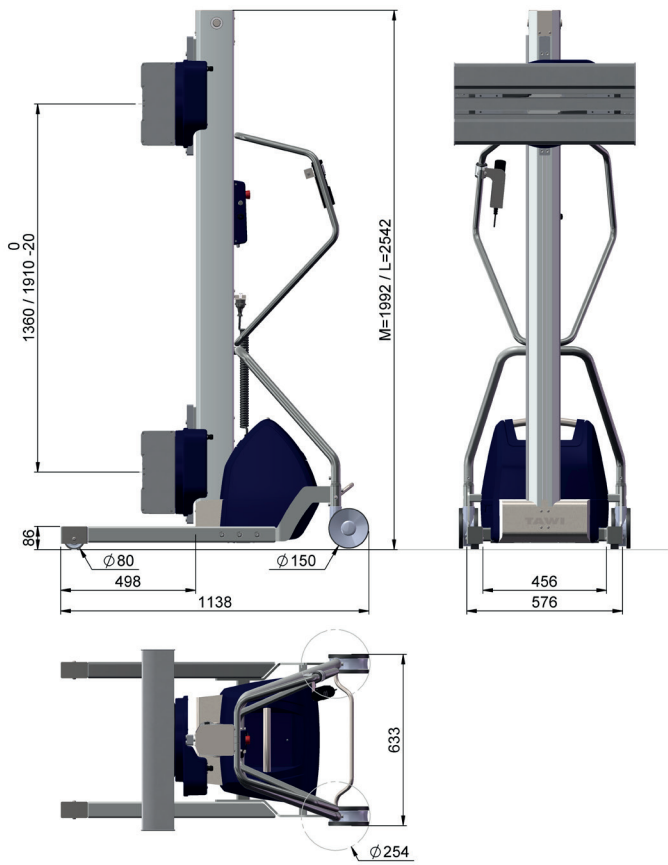


All measures are LxWxH

Fixed arms

Safely lift and transport goods of varying sizes with fixed arms mounted on your PRO100ESE.

Art. 896800
For reels Ø350-620 mm

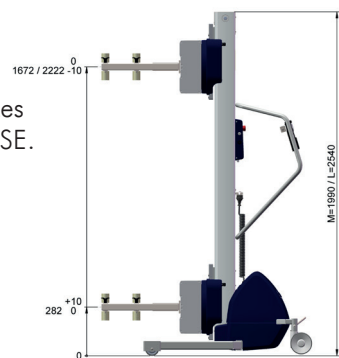



A2 = Stainless steel
FZB = Zincified mild steel

Swiveling arms

Safely lift, tilt and rotate goods of varying sizes with swiveling arms mounted on your PRO100ESE.



Art. 896810
For reels Ø260-530 mm

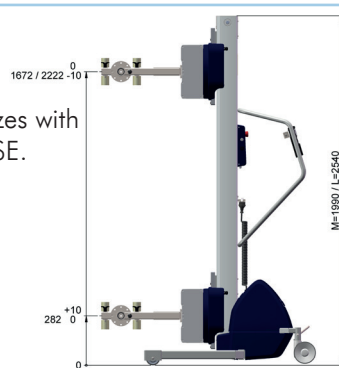

Fixed arms

Safely lift and transport goods of varying sizes with fixed arms mounted on your PRO200ESE.


Art. 897800
For reels Ø350-620 mm

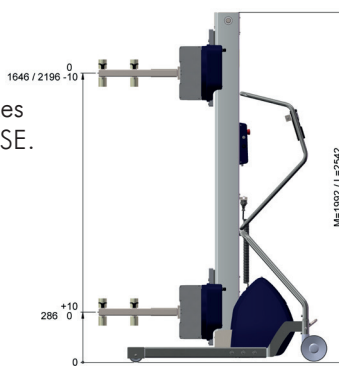

Swiveling arms

Safely lift, tilt and rotate goods of varying sizes with swiveling arms mounted on your PRO200ESE.

Art. 897810
For reels Ø260-530 mm

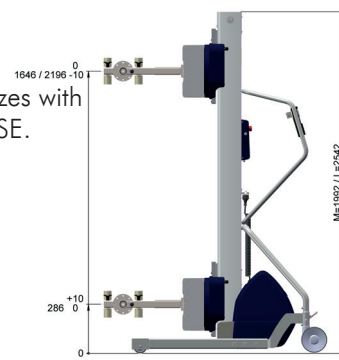



Swedish quality. Global solutions.